


Sadeltyp



NPS	D mm	t mm	w mm	l mm	k mm	h mm	bult/ mutter mm	Kg / st	Art nr polerad	EN 1.4301 slipad G320	Art nr satin	EN 1.4404 oslipad
	10.00	2.0	20.0	18.0	33.0	9.0	M8 x 20	0.04			CS 10	●
	12.00	2.0	20.0	18.0	35.0	9.0	M8 x 20	0.05			CS 10	●
	15.00	2.0	20.0	18.0	38.0	9.0	M8 x 20	0.05			CS 10	●
10.00	17.20	2.0	20.0	20.0	42.2	9.0	M8 x 20	0.50			CS 10	●
15.00	20.00	2.5	20.0	20.0	45.0	9.0	M8 x 20	0.06	CS12	●	CS 10	●
15.00	21.30	2.5	20.0	20.0	46.3	9.0	M8 x 20	0.06			CS 10	●
20.00	25.00	2.5	20.0	20.0	50.0	9.0	M8 x 20	0.07			CS 10	●
20.00	26.90	2.5	20.0	20.0	51.9	9.0	M8 x 20	0.08	CS12	●	CS 10	●
20.00	28.00	2.5	20.0	20.0	53.0	9.0	M8 x 20	0.08			CS 10	●
25.00	30.00	2.5	20.0	20.0	55.0	9.0	M8 x 20	0.08			CS 10	●
25.00	33.70	2.5	20.0	20.0	58.7	9.0	M8 x 20	0.08	CS12	●	CS 10	●
32.00	42.40	2.5	20.0	20.0	67.4	9.0	M8 x 20	0.11	CS12	●	CS 10	●
32.00	44.50	2.5	20.0	20.0	69.5	9.0	M8 x 20	0.11			CS 10	●
40.00	48.30	2.5	20.0	20.0	73.3	9.0	M8 x 20	0.12	CS12	●	CS 10	●
50.00	54.00	2.5	20.0	20.0	79.0	9.0	M8 x 20	0.13			CS 10	●
50.00	60.30	2.5	20.0	20.0	85.3	9.0	M8 x 20	0.16	CS12	●	CS 10	●
65.00	70.00	3.0	20.0	20.0	96.0	9.0	M8 x 25	0.17	CS12	●	CS 10	●
65.00	76.10	3.0	20.0	20.0	102.1	9.0	M8 x 25	0.18			CS 10	●
80.00	84.00	3.0	20.0	20.0	110.0	9.0	M8 x 25	0.19	CS12	●	CS 10	●
80.00	88.90	3.0	20.0	20.0	114.9	9.0	M8 x 25	0.20	CS12	●	CS 10	●
100.00	104.00	4.0	20.0	20.0	132.0	9.0	M8 x 25	0.29			CS 10	●
100.00	108.00	4.0	20.0	20.0	136.0	9.0	M8 x 25	0.30			CS 10	●
100.00	114.30	4.0	20.0	20.0	142.3	9.0	M8 x 25	0.31	CS12	●	CS 10	●
125.00	129.00	4.0	25.0	25.0	162.0	9.0	M8 x 25	0.43			CS 10	●
125.00	139.70	4.0	25.0	25.0	172.7	9.0	M8 x 25	0.46			CS 10	●
150.00	154.00	4.0	25.0	25.0	187.0	11.0	M10 x 30	0.64			CS 10	●
150.00	168.30	5.0	25.0	25.0	203.3	11.0	M10 x 30	0.69			CS 10	●
200.00	204.00	5.0	25.0	25.0	239.0	11.0	M10 x 30	0.80			CS 10	●
200.00	219.10	5.0	25.0	25.0	254.1	11.0	M10 x 30	0.85			CS 10	●
250.00	256.00	5.0	25.0	25.0	291.0	11.0	M10 x 30	0.97			CS 10	●
250.00	273.00	5.0	25.0	25.0	308.0	11.0	M10 x 30	1.02			CS 10	●
300.00	306.00	5.0	25.0	25.0	341.0	11.0	M10 x 30	1.12			CS 10	●
300.00	323.90	5.0	25.0	25.0	358.9	11.0	M10 x 30	1.18			CS 10	●

● =lager

Mått och ritningar är vägledande




Sadeltyp med rundstång, betad



NPS	D mm	t mm	w mm	l mm	L mm	d mm	bult/ mutter mm	Kg / st	Art nr polerad	EN 1.4404 oslipad
	12.00	2.0	20.0	18.0	100.0	10.0	M8 x 20	0.11	CT 10	●
15.00	21.30	2.5	20.0	20.0	100.0	10.0	M8 x 20	0.12	CT 10	●
20.00	25.00	2.5	20.0	20.0	100.0	10.0	M8 x 20	0.12	CT 10	●
20.00	26.90	2.5	20.0	20.0	100.0	10.0	M8 x 20	0.13	CT 10	●
20.00	28.00	2.5	20.0	20.0	100.0	10.0	M8 x 20	0.13	CT 10	●
25.00	33.70	2.5	20.0	20.0	100.0	10.0	M8 x 20	0.13	CT 10	●
32.00	42.40	2.5	20.0	20.0	100.0	10.0	M8 x 20	0.18	CT 10	●
40.00	48.30	2.5	20.0	20.0	100.0	10.0	M8 x 20	0.18	CT 10	●
50.00	54.00	2.5	20.0	20.0	100.0	10.0	M8 x 20	0.19	CT 10	●
50.00	60.30	2.5	20.0	20.0	100.0	10.0	M8 x 20	0.22	CT 10	●
65.00	76.10	3.0	20.0	20.0	150.0	10.0	M8 x 25	0.32	CT 10	●
80.00	88.90	3.0	20.0	20.0	150.0	10.0	M8 x 25	0.34	CT 10	●

● =lager

Mått och ritningar är vägledande

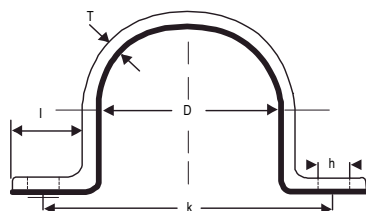


U-Clips



NPS	D mm	t mm	w mm	l mm	k mm	bult/ mutter mm	Kg / st	Art nr polerad	Art nr satin	EN 1.4404 oslipad
	12.00	2.0	20.0	18.0	36.0	9	0.02		CU10	●
10.00	17.20	2.0	20.0	20.0	41.2	9	0.02		CU10	●
15.00	20.00	2.0	20.0	20.0	44.0	9	0.03		CU10	●
15.00	21.30	2.0	20.0	20.0	45.3	9	0.03		CU10	●
20.00	25.00	2.0	20.0	20.0	49.0	9	0.03		CU10	●
20.00	26.90	2.0	20.0	20.0	50.9	9	0.03		CU10	●
25.00	30.00	2.0	20.0	20.0	54.0	9	0.04		CU10	●
25.00	33.70	2.0	20.0	20.0	57.7	9	0.04		CU10	●
32.00	42.40	2.5	20.0	20.0	67.4	9	0.06		CU10	●
32.00	44.50	2.5	20.0	20.0	69.5	9	0.06		CU10	●
40.00	48.30	2.5	20.0	20.0	73.3	9	0.06		CU10	●
50.00	54.00	2.5	20.0	20.0	79.0	9	0.07		CU10	●
50.00	60.30	3.0	20.0	20.0	86.3	9	0.09		CU10	●
65.00	76.10	3.0	20.0	20.0	102.1	9	0.11	CU11	CU10	●
80.00	84.00	3.0	20.0	20.0	110.0	9	0.12		CU10	●
80.00	88.90	3.0	20.0	20.0	114.9	9	0.13		CU10	●
100.00	104.00	4.0	20.0	20.0	132.0	9	0.19		CU10	●
100.00	108.00	4.0	20.0	20.0	136.0	9	0.20		CU10	●
100.00	114.30	4.0	20.0	20.0	142.3	9	0.21		CU10	●
125.00	129.00	4.0	25.0	25.0	162.0	11	0.30		CU10	●
125.00	139.70	4.0	25.0	25.0	172.7	11	0.32		CU10	●
150.00	154.00	4.0	25.0	25.0	187.0	11	0.35		CU10	●
150.00	168.30	5.0	25.0	25.0	203.3	11	0.49		CU10	●
200.00	204.00	5.0	25.0	25.0	239.0	11	0.57		CU10	●
200.00	219.10	5.0	25.0	25.0	254.1	11	0.61		CU10	●
250.00	256.00	5.0	25.0	25.0	291.0	11	0.70		CU10	●
250.00	273.00	5.0	25.0	25.0	308.0	11	0.74		CU10	●
300.00	306.00	5.0	25.0	25.0	341.0	11	0.83		CU10	●
300.00	323.90	5.0	25.0	25.0	358.9	11	0.88		CU10	●

● =lager
Mått och ritningar är vägledande

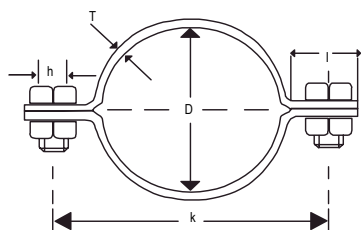

Sadeltyp, OT73 och OT74



NPS	D mm	B mm	L mm	d mm	T mm	bult/ mutter mm	Kg / st	Artikel nr	EN 1.4404 oslipad
10.00	14–18	25.0	40.0	7.5	2.0	M6 x 20	0.04	C010	●
15.00	20–22	25.0	44.0	7.5	2.0	M6 x 20	0.04	C010	●
20.00	23–24	25.0	46.0	7.5	3.0	M6 x 20	0.06	C010	●
	25–28	25.0	52.0	7.5	3.0	M6 x 20	0.07	C010	●
25.00	30–33.7	25.0	57.0	7.5	3.0	M6 x 20	0.08	C010	●
32.00	35–38	25.0	63.0	7.5	3.0	M6 x 20	0.09	C010	●
32-40	42.4–44.5	30.0	69.0	7.5	3.0	M6 x 20	0.11	C010	●
40.00	48.3	30.0	73.0	7.5	3.0	M6 x 20	0.12	C010	●
50.00	53–54	40.0	87.0	9.5	3.0	M8 x 25	0.18	C010	●
	57–60.3	40.0	91.0	9.5	3.0	M8 x 25	0.19	C010	●
65.00	68–70	40.0	100.0	9.5	3.0	M8 x 25	0.21	C010	●
70.00	73–76.1	40.0	120.0	9.5	3.0	M8 x 25	0.25	C010	●
80.00	82–84	40.0	131.0	9.5	3.0	M8 x 25	0.28	C010	●
	88.9	40.0	120.0	9.5	3.0	M8 x 25	0.25	C010	●
100.00	102–106	40.0	148.0	12.0	3.0	M10 x 25	0.31	C010	●
	114.3	40.0	156.0	12.0	3.0	M10 x 35	0.33	C010	●
125.00	127–131	40.0	177.0	12.0	3.0	M10 x 25	0.37	C010	●
	139.7	40.0	186.0	12.0	3.0	M10 x 35	0.39	C010	●
150.00	152–156	40.0	198.0	12.0	3.0	M10 x 25	0.42	C010	●
	168.3	40.0	206.0	12.0	4.0	M10 x 35	0.58	C010	●
200.00	202–206	40.0	244.0	15.0	4.0	M12 x 35	0.69	C010	●
	219.1	40.0	262.0	15.0	4.0	M12 x 35	0.74	C010	●
250.00	252–256	40.0	298.0	15.0	4.0	M12 x 50	0.84	C010	●
	273.00	40.0	316.0	15.0	4.0	M12 x 50	0.90	C010	●
300.00	302–306	50.0	369.0	18.0	4.0	M16 x 50	1.30	C010	●
	323.9	50.0	390.0	18.0	4.0	M16 x 50	1.37	C010	●
350.00	353–356	50.0	413.0	18.0	4.0	M16 x 50	1.45	C010	●
400.00	404–406	50.0	464.0	18.0	4.0	M16 x 50	1.63	C010	●
450.00	454–458	50.0	515.0	18.0	4.0	M16 x 60	1.81	C010	●
500.00	504–508	50.0	567.0	18.0	4.0	M16 x 60	2.00	C010	●
600.00	604–610	50.0	669.0	18.0	4.0	M16 x 65	2.35	C010	●

● =lager
Mått och ritningar är vägledande

